

Presoak SF

TECH DATA

1072

Classification:

- Lo pH Presoak

Product Description and Purpose:

Presoak SF is a super concentrated high foaming low pH lubricating detergent containing detergents and specialty solvents and emulsifiers that gently penetrate and loosen the most difficult road soils and oils for quick and complete removal. Also helps accelerate drying.

Features/Benefits:

- Super concentrated
- Excellent foamer
- Excellent cleaner
- Neutralizes residual alkalinity
- Brightens chrome
- Economizes drying agents
- Applicable through foamers or spray arches or cloth applications
- Free rinsing

Surfaces Applicable:

- All exterior auto services

General Usage Directions:

- **CONVEYOR FOAMER:** 150:1 to 240:1. Use at ¼ - ½ ounces per car.
- **CONVEYOR CLOTH LUBE:** 300:1 to 600:1.
- **AUTOMATIC PRESOAK:** 150:1 to 366:1. Use at ¼ to ½ ounces per car.

Physical Properties:

- Form Liquid
- Color Clear to straw
- Odor Characteristic
- pH 1-3
- Specific Gravity 1.10-1.15
- Boiling Point 212°F
- Foam Medium

Package Sizes & Product Numbers:


- 30 gal drum 1072-D30
- 2X2.5 gal case 1072-C5
- 4X1 case 1072-B4
- 5 gal drum 1072-B5
- 15 gal drum 1072-D15

Titration Procedures:

- Fill clean plastic test tube to the 5-ml mark with application solution.
- Add 3 drops of Indicator. No color change will occur.
- Add 0.5N NaOH titration solution drop by drop. Invert between drops until solution turns pink.

Caution:

Keep out of reach of children. Harmful if swallowed. Avoid contact with skin, eyes, mucous membranes. Wear rubber gloves, goggles, and protective clothing when handling product. Keep container tightly closed when not in use. Protect from freezing. For industrial use only. Read Safety Data Sheets for more information.

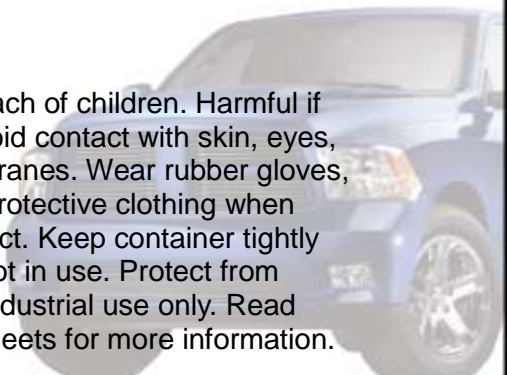

CK Enterprises, Inc.